


H.264Lite 4CH D1 DVR



► FEATURES

- H.264 Algorithm hardware compression
- Full Graphic User Interface (Support Multiple Languages)
- Support Non-English Character and Input for Camera Titles
- Individual Channel Recording Setup (Resolution, Frame rates and Quality)
- Dual Video Streaming, One for Local Recording and the Other for Network Transmission
- Support 2 HDDs, up to 4TB
- Support 3G Mobile Phone Viewing

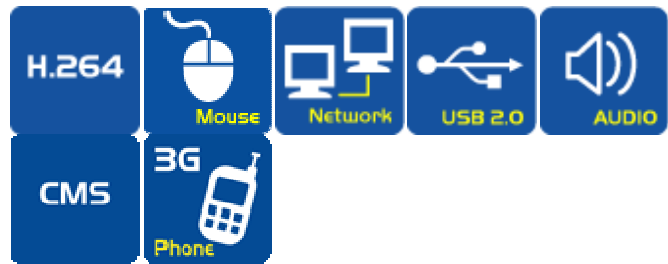

► SPECIFICATIONS

MODEL NO.		H4120E-D1		
Camera Input		4 BNC		
Output		1 BNC /1 VGA		
Audio Input / Output		1 RCA /1 RCA		
Operating System		Embedded Linux OS		
Display Speed		Real Time		
Display Resolution		720 X 480(NTSC), 720 X 576(PAL)		
Display Split screen		1,4, Sequence		
Compression Format		H.264		
Picture Quality		5 LEVEL (Highest, High, Normal, Basic, Below Basic)		
Recording Speed	NTSC	704 x 480 - 120FPS	704 x 240 - 120FPS	352 x 240 - 120FPS
	PAL	704 x 576 - 100FPS	704 x 288 - 100FPS	352 x 288 - 100FPS
Recording Mode		Manual, Event(Motion), Schedule		
Schedule		Setup by minute as unit		
Motion Detection		Available per each camera and multi-detection level		
Playback Display		1,4		
Search mode		Event, Time		
Playback Speed		Normal, REW & FF [Recorded Speed x2, x4, x8, x16,x32,x64,x1/2,x1/4],Frame to Frame, Pause		
Network Interface		Ethernet, PPPoE		
Network Protocol		TCP/IP, HTTP, DHCP		
Application		Windows XP / Windows Vista / Windows 7 (PC Client system& IE)		
Web Browser		Internet Explorer		
Backup		Network, USB 2.0Thumb Driver		
HDD		Supports 2 SATA HDD		
Control Device		Remote Control / Mouse / AP Software		
External I/O		RS- 485		
Power Consumption		12V / 5 A		
Operating Temperature		5℃~40℃(41~104F)		
Relative Humidity		Maximum 90% non-condensing		
Dimension(mm)		337(W) x 256(D) x 60(H)		
Weight(N.W)		Approx. 1.8kgs / 4 lbs (W/O HDD)		